


Written Assessment:

Administration Time:3 hoursNumber of Questions:183

Areas Covered:

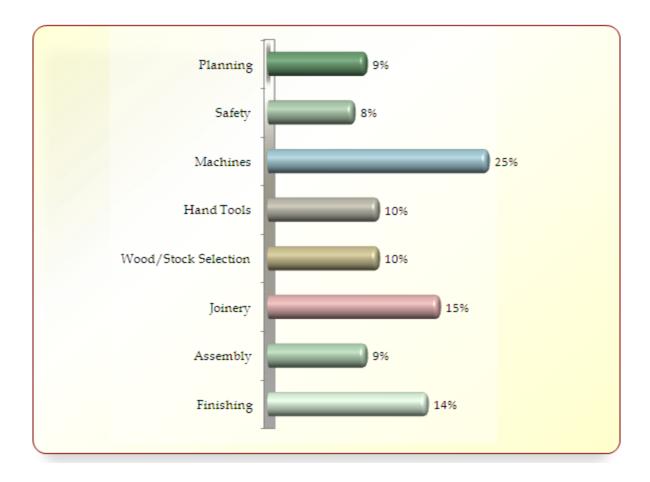

Page 1 of 2

Sample Questions:

Fires which involve energized electrical equipment should be fought with which one of the following classes of fire extinguishers?

- A. Class A
- B. Class B
- C. Class C
- D. Class D

Stock 1/8-inch thick may be run through the machine surface planer if it is

- A. fed through on top of a thicker, wider and longer board
- B. treated with shellac to prevent splintering
- C. free of knots and nails
- D. glued with a doweled joint

Pneumatic tools require periodic maintenance for cleaning and ______ of internal parts.

- A. oiling
- B. flushing with solvent
- C. flushing with alcohol
- D. watering

For assembling a 3/4-inch thick piece of wood to a 2-inch piece, a 3/8-inch deep countersink is specified; which of the following lengths of screws is recommended?

- A. 1-1/4 inches long
- B. 1-1/2 inches long
- C. 1-3/4 inches long
- D. 2 inches long

While applying inert fillers, the filler material should be thoroughly stirred every

- _____ minutes.
- A. 5 10
- B. 10 15
- C. 20 25
- D. not at all